
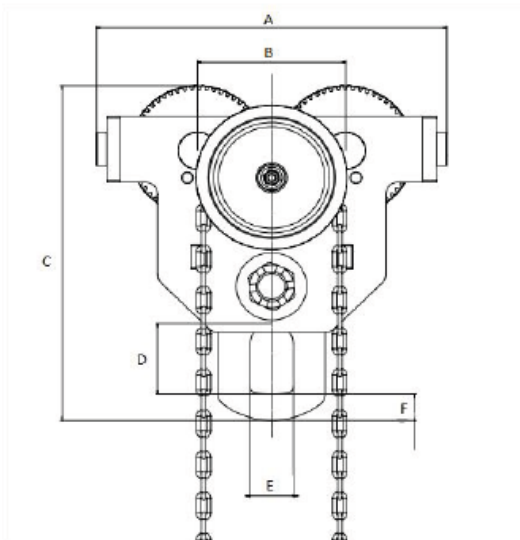


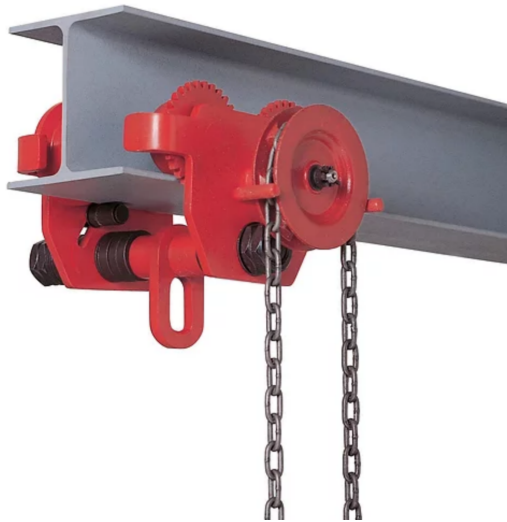

GEARED GIRDER TROLLEY

Brand: OzBlok
Capacity: 0.5t to 50.0t

Lightweight and fully adjustable, this robust geared girder trolley suits varying flange widths of up to 350mm along R.S.J's and universal beams, allowing for easy manual handling of heavy loads. Offering greater load control, this geared trolley provides additional flexibility and user safety.

Australian Standard: AS 1418

Features

- ✓ Zinc plated hand chains
- ✓ Fitted with anti-drop plates
- ✓ Durable baked enamel paint protection
- ✓ Precision sealed ball bearing trolley wheels
- ✓ Super quick adjustments to suit any monorail

Industries

- ✓ Automotive
- ✓ Civil
- ✓ Construction
- ✓ Engineering
- ✓ Entertainment
- ✓ Hire
- ✓ Lifts/Elevators
- ✓ Manufacturing
- ✓ Mining
- ✓ Ports


Documents

- ↓ [Geared Girder Trolley Brochure](#)
- ↓ [Geared Girder Trolley Manual](#)






- 2024 – Geared Girder Trolley Data Sheet
- HES Brochure 2025

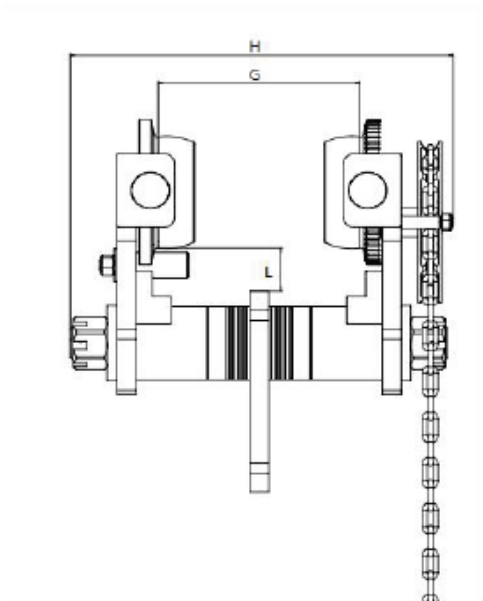

Specifications

PRODUCT CODE	W.L.L.	MIN. RADIUS CURVE	HAND CHAIN SIZE	ADJUSTABLE BEAM WIDTH	NET WEIGHT
GTOZ010	1.0t	1.0m	5mm x 25	64mm – 210mm	10.4kg
GTOZ020	2.0t	1.1m	5mm x 25	88mm – 210mm	16.9kg
GTOZ030	3.0t	1.3m	5mm x 25	100mm – 305mm	27.5kg
GTOZ050	5.0t	1.4m	5mm x 25	114mm – 305mm	41.7kg





PRODUCT CODE	W.L.L.	MIN. RADIUS CURVE	HAND CHAIN SIZE	ADJUSTABLE BEAM WIDTH	NET WEIGHT
GTOZ100	10.0t	1.7m	5mm x 25	125mm – 305mm	69.2kg
GTOZ200	20.0t	4.7m	5mm x 25	210mm – 330mm	249kg

Dimensions

PRODUCT CODE	W.L.L.	A	B	C	D	E	F	G	H
GTOZ010	1.0t	212.00mm	92.00mm	199.50mm	34.00mm	24.00mm	15.00mm	210.00mm	339.50mm
GTOZ020	2.0t	256.00mm	108.00mm	241.26mm	47.50mm	33.00mm	17.00mm	210.00mm	350.20mm
GTOZ030	3.0t	308.00mm	130.00mm	300.50mm	58.50mm	37.00mm	25.00mm	305.00mm	456.00mm
GTOZ050	5.0t	346.00mm	149.00mm	334.70mm	71.50mm	42.00mm	26.50mm	305.00mm	474.00mm
GTOZ100	10.0t	406.00mm	172.00mm	407.14mm	86.00mm	50.00mm	32.00mm	305.00mm	495.00mm
GTOZ200	20.0t	650.00mm	642.00mm	622.00mm	-	-	-	-	314.00mm

