



OZBLOK ELECTRIC CHAIN HOIST

Brand: OzBlok
Capacity: 0.25t to 1.0t

Designed for flexibility and durability, this economical, compact and lightweight dual speed electric chain hoist is ideal for assembly lines and workstations where precision and accuracy is required. Available in single or three phase with variable chain lengths, this robust hoist provides optimal safety and efficiency across a wide range of applications.

Australian Standard: AS 1418

Features



- ✓ Fivefold protected inverter control board
- ✓ All aluminium alloy die cast hoist body, IP54
- ✓ Dual speed constant torque inverter motor with overload protection
- ✓ Gearbox with full machined helical gears, case hardened, oil bath lubrication
- ✓ Aviation plugs and sockets for constant conductivity, and elimination of plug falling off


Industries

- ✓ Automotive
- ✓ Civil
- ✓ Construction
- ✓ Engineering
- ✓ Logistics
- ✓ Manufacturing
- ✓ Mining

Documents

- ↓ [Dual Speed Electric Chain Hoist Brochure](#)
- ↓ [Dual Speed Electric Chain Hoist Manual](#)

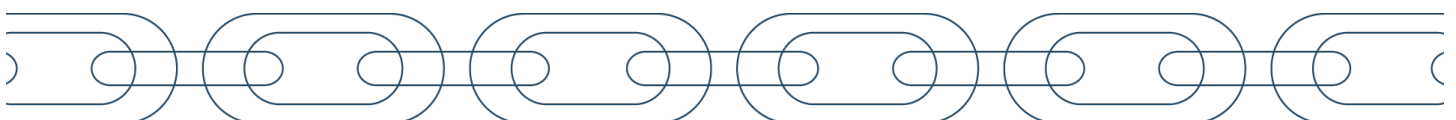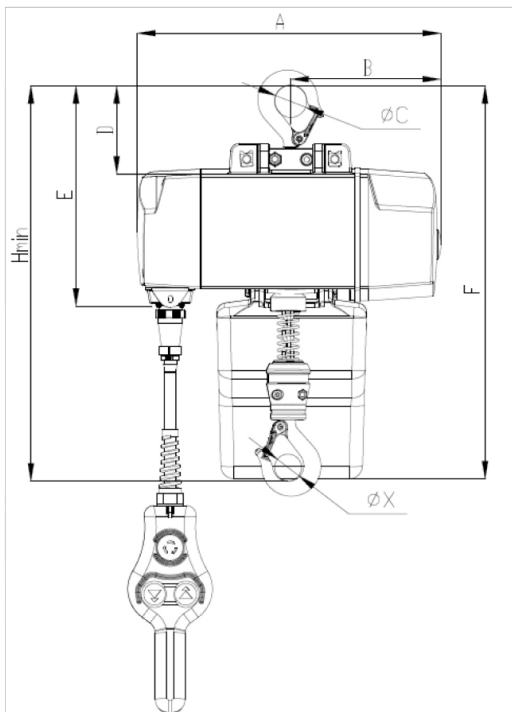


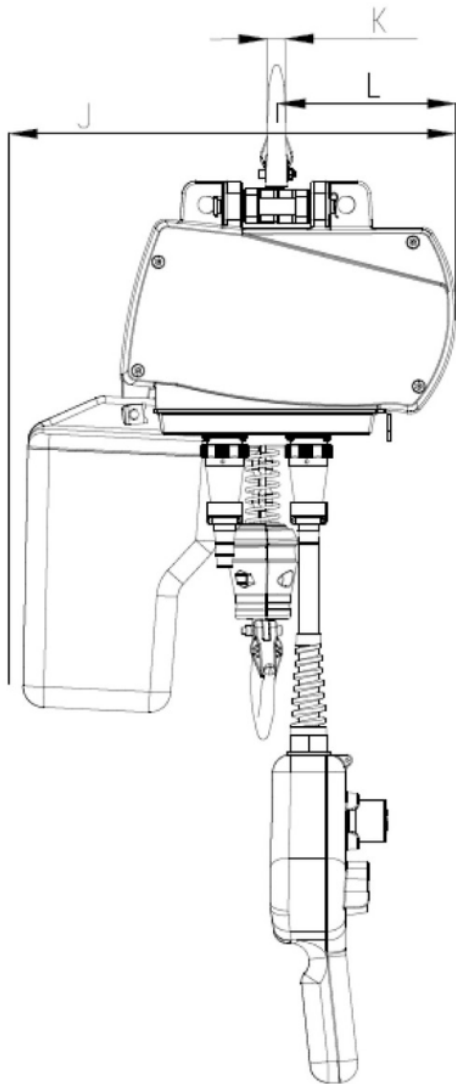

- 2024 – Electric Chain Hoist Data Sheet
- HES Brochure 2025

Specifications

PRODUCT CODE	W.L.L.	LIFTING HEIGHT	WORKING LEVEL (ISO)	DUAL SPEED (M/MIN)	LOAD CHAIN	FALLS OF CHAIN	VOLTAGE (V/Hz)	DUTY CYCLE (FC%)	NET WEIGHT
ECHOZH002-1P	0.25t	3-6m	M5	5/20	4×12	1	240	40	22kg
ECHOZH005-1P	0.5t	3-6m	M5	1.5/6	5×15	1	240	40	23kg
ECHOZH003-3P	1.0t	3-6m	M5	2/8	7×21	1	415	40	48kg

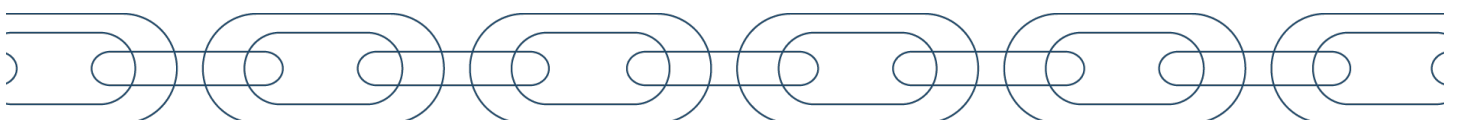



HOISTING
EQUIPMENT
SPECIALISTS
Quality Lifting and Rigging Solutions

1300 792 464

sales@hesgroup.com.au

Dimensions

PRODUCT CODE	W.L.L.	A	C	D	E	F	HMIN	K	X
ECHOZH002-1P	0.25t	345mm	24mm	102mm	233mm	450mm	382mm	13mm	24mm
ECHOZH005-1P	0.5t	345mm	27mm	113mm	244mm	461mm	424mm	16mm	27mm
ECHOZH003-3P	1.0t	458mm	35mm	127mm	313mm	578mm	569mm	22mm	35mm

