



LOADSAFE CHAIN BLOCK

Brand: OzBlok
Capacity: 0.50t to 5.0t

Durable and robust, all Loadsafe chain hoists are fitted with an overload activated clutch, limiting the maximum operating force and allowing for greater operator protection from injury and the hoist from damage.

Australian Standard: AS 1418

Features


- ✓ Factory proof tested to 1.5x W.L.L
- ✓ Unique hand wheel and free wheel design
- ✓ Hook tip with cast steel self-locking latches
- ✓ Lower hook complete with thrust race bearing
- ✓ Fully machined lift wheel, supported by needle roller bearings


Industries

- ✓ Automotive
- ✓ Civil
- ✓ Construction
- ✓ Engineering
- ✓ Infrastructure
- ✓ Logistics
- ✓ Manufacturing
- ✓ Ports


Documents

- ↓ [LoadSafe Chain Block Product Brochure](#)
- ↓ [LoadSafe Chain Block Product Manual](#)
- ↓ [2024 - LoadSafe Chain Block Data Sheet](#)
- ↓ [HES Brochure 2025](#)

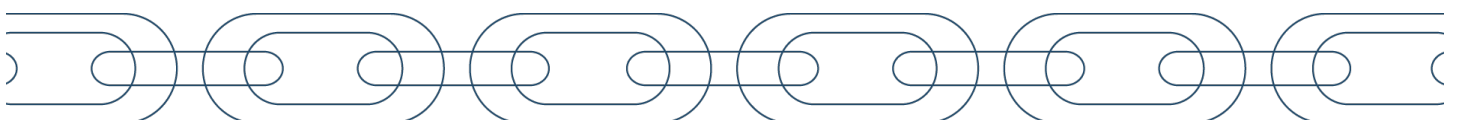

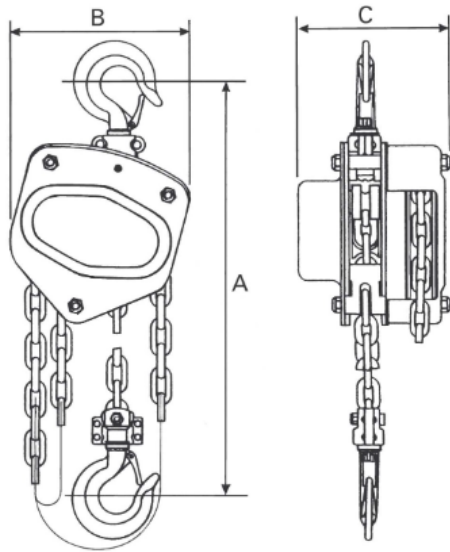

0.5, 1, 1.5 & 2 tonne

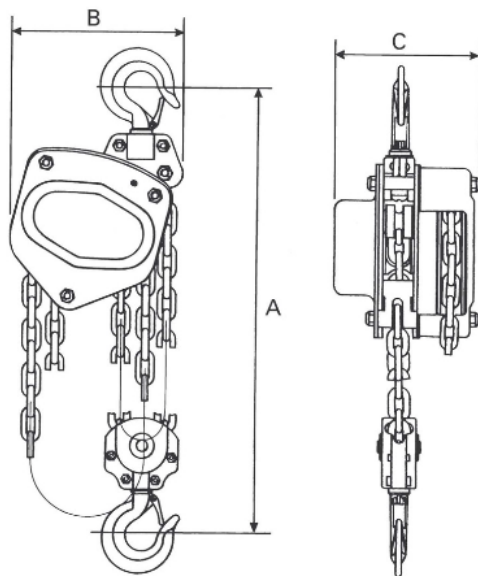

3 & 5 tonne

Specifications






PRODUCT CODE	W.L.L.	STANDARD LIFT	FALLS OF CHAIN	HAND EFFORT TO LIFT W.L.L.	NET WEIGHT	LOAD CHAIN DIAMETER
CBOZLS010-3	1.0t	3m	1	30kg	12kg	6mm
CBOZLS020-3	2.0t	3m	1	35kg	18kg	8mm
CBOZLS030-3	3.0t	3m	2	37kg	25kg	8mm
CBOZLS050-3	5.0t	3m	2	41kg	37kg	10mm
CBOZLS010-6	1.0t	6m	1	30kg	17kg	6mm
CBOZLS020-6	2.0t	6m	1	35kg	24kg	8mm
CBOZLS030-6	3.0t	6m	2	37kg	35kg	8mm
CBOZLS050-6	5.0t	6m	2	41kg	52kg	10mm

Dimensions

PRODUCT CODE	A	B	C	HOOK OPENING
CBOZLS010-3	317mm	158mm	140mm	28mm

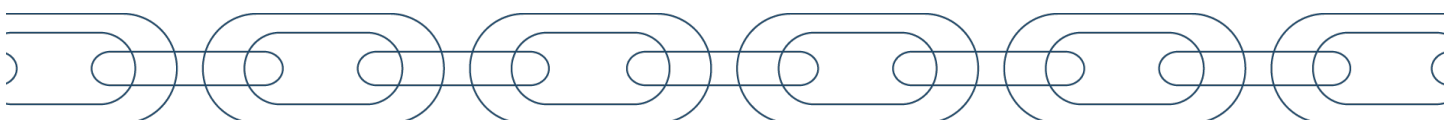



PRODUCT CODE	A	B	C	HOOK OPENING
CBOZLS020-3	414mm	187mm	161mm	33.5mm
CBOZLS030-3	465mm	210mm	161mm	40mm
CBOZLS050-3	636mm	253mm	161mm	50mm
CBOZLS010-6	317mm	158mm	140mm	28mm
CB0ZLS020-6	414mm	187mm	161mm	33.5mm
CBOZLS030-6	465mm	210mm	161mm	40mm
CBOZLS050-6	636mm	253mm	161mm	50mm

