

## GIRDER CLAMP

Brand: OzBlok  
Capacity: 1.0t to 10.0t

Lightweight and economical, this functional and portable girder clamp enables a fast, simple and secure means of attaching a lifting point to a beam. Suitable for a wide range of i-beams and flange widths with low head room.

Australian Standard: AS 1418

### Features


- ✓ Wide adjustment range
- ✓ Robust all-steel construction
- ✓ Designed to minimise stress applied to beam
- ✓ Super quick adjustment to any girder width in range
- ✓ Integrated load bar with multi directional adjusting screw spindle


### Industries

- ✓ Civil
- ✓ Construction
- ✓ Engineering
- ✓ Entertainment
- ✓ Hire
- ✓ Lifts/Elevators
- ✓ Marine
- ✓ Manufacturing
- ✓ Mining
- ✓ Ports
- ✓ Warehousing

### Documents

- ↓ [2024 - Girder Clamp Data Sheet](#)

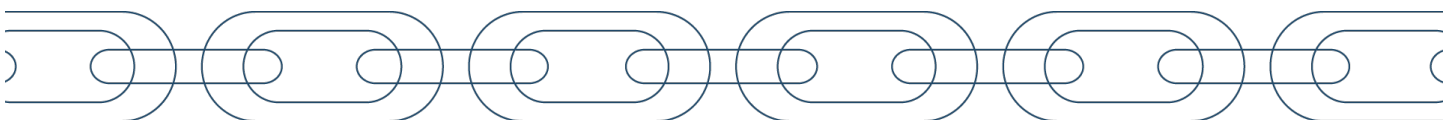




[HES Brochure 2025](#)

## Specifications

<b>PRODUCT CODE</b>	<b>W.L.L.</b>	<b>ADJUSTABLE BEAM WIDTH</b>
GCOZ010	1.0t	75mm - 230mm
GCOZ020	2.0t	75mm - 230mm
GCOZ030	3.0t	80mm - 320mm
GCOZ050	5.0t	90mm - 320mm
GCOZ100	10.0t	90mm - 320mm

## Dimensions

<b>PRODUCT CODE</b>	<b>W.L.L.</b>	<b>A</b>	<b>B (min)</b>	<b>B (max)</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F (min)</b>	<b>F (max)</b>	<b>G</b>	<b>H</b>
GCOZ010	1.0t	278mm	182mm	380mm	64mm	4mm	217mm	90mm	150mm	26mm	19mm
GCOZ020	2.0t	278mm	182mm	380mm	74mm	6mm	217mm	90mm	150mm	26mm	21mm
GCOZ030	3.0t	356mm	220mm	500mm	100mm	8mm	217mm	145mm	220mm	50mm	23mm

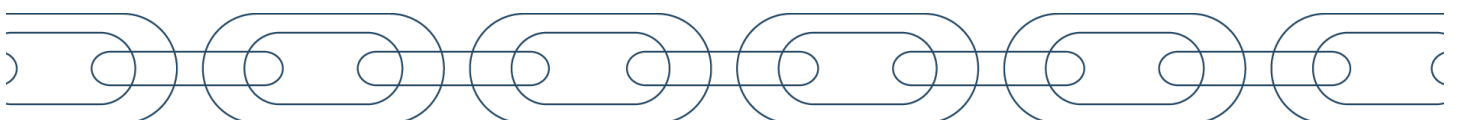



<b>PRODUCT CODE</b>	<b>W.L.L.</b>	<b>A</b>	<b>B (min)</b>	<b>B (max)</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F (min)</b>	<b>F (max)</b>	<b>G</b>	<b>H</b>
GCOZ050	5.0t	356mm	220mm	500mm	112mm	10mm	277mm	145mm	220mm	47mm	29mm
GCOZ100	10.0t	356mm	250mm	520mm	120mm	12mm	285mm	160mm	230mm	52mm	39mm

