



OZ MECHANICAL LEVER HOIST

Brand: OzBlok
Capacity: 0.8t to 9.0t

With a powder-coated finish and all steel construction, this robust lever hoist is perfect when an increased workload is required. Safe and reliable, the Oz Mechanical Lever Hoist allows for maximum mechanical efficiency with minimal user effort.

Australian Standard: AS 1418

Features

- ✓ Five pocket lift wheel
- ✓ Simple free wheel operation
- ✓ On-piece construction pinion gear
- ✓ Super-strength, special grade zinc alloy load chain
- ✓ Forged malleable hooks with wide throat opening and deformation indicators


Industries

- ✓ Automotive
- ✓ Civil
- ✓ Construction
- ✓ Engineering
- ✓ Forestry
- ✓ Infrastructure
- ✓ Lifts/Elevators
- ✓ Manufacturing
- ✓ Mining
- ✓ Ports


Documents

- ↓ [Oz Mechanical Lever Hoist Brochure](#)



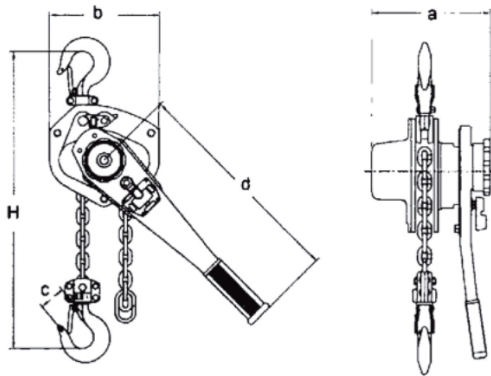

0.75, 1, 1.5 & 3 tonne

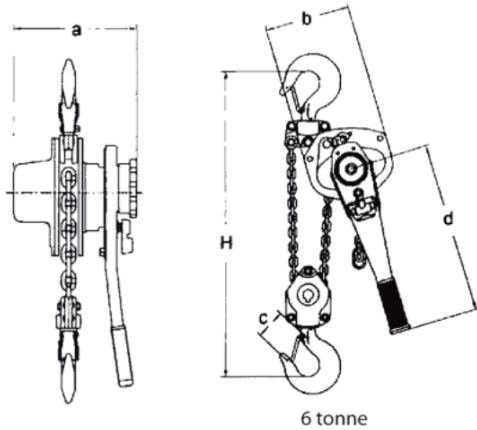

6 tonne

- [Oz Mechanical Lever Hoist Manual](#)
- [2024 - Oz Mechanical Lever Hoist Data Sheet](#)
- [HES Brochure 2025](#)

Specifications

PRODUCT CODE	W.L.L.	FALLS OF CHAIN	CHAIN DIAMETER	LOAD CHAIN GRADE	EFFORT TO LIFT RATED LOAD	NET WEIGHT WITH 1.5M LIFT	EXTRA WEIGHT PER M
LHOZM008	0.8t	1	6.3mm	80	15kg	6.9kg	0.85kg
LHOZM016	1.6t	1	7.1mm	100	19.3kg	9.7kg	1.11kg
LHOZM030	3.0t	1	9.0mm	100	40.9kg	16.3kg	1.77kg





PRODUCT CODE	W.L.L.	FALLS OF CHAIN	CHAIN DIAMETER	LOAD CHAIN GRADE	EFFORT TO LIFT RATED LOAD	NET WEIGHT WITH 1.5M LIFT	EXTRA WEIGHT PER M
LHOZM060	6.0t	2	9.0mm	100	42kg	26.7kg	3.55kg
LHOZM090	9.0t	3	9.0mm	100	43kg	38.5kg	5.32kg

Dimensions

PRODUCT CODE	W.L.L.	A	B	C	D	H
LHOZM008	0.8t	148mm	128mm	37mm	256mm	295mm
LHOZM016	1.6t	163mm	148mm	47mm	368mm	335mm
LHOZM030	3.0t	191mm	181mm	62mm	368mm	405mm
LHOZM060	6.0t	191mm	244mm	78mm	368mm	550mm
LHOZM090	9.0t	191mm	314mm	X	368mm	680mm

